DSE203N M Series

Compact electronic RCBO 3P+N in 3 module



Features
- Compact electronic RCBO 3P+N in 3M
- Supply from the bottom, load from top
- Presence of flying neutral lead
- Neutral unswitched
- 10kA breaking capacity, A and AC type
- Rated current up to 63 A
- B and C tripping characteristics with rated currents from 6 to 63A
- Sensitivity 10, 30, 100, 300mA
- CPI window to give fast and easy identification of the contacts status
- Voltage dependent RCBO

Function
Protection and control of the circuits against overloads and short-circuits; protection against the effects of sinusoidal alternating and direct pulsating earth fault currents; protection against indirect contact and additional protection against direct contact (IΔn = 30 mA).

Applications
Residential, commercial, industrial

Standard
IEC 61009-1; IEC 61009-2-2; AS/NZS 61009.1

DSE203N M eRCBO 3P+N 3M


Product at a glance

Load connection
Load from the top. Neutral is unswitched and on the left.

All screws are on the same level for a fast and easy installation.

Printed information
Main technical information is printed on the front side, visible also when the device is installed.

Easy to install
Supply from the bottom, for a quick installation in chassis distribution board and DIN-Rail.

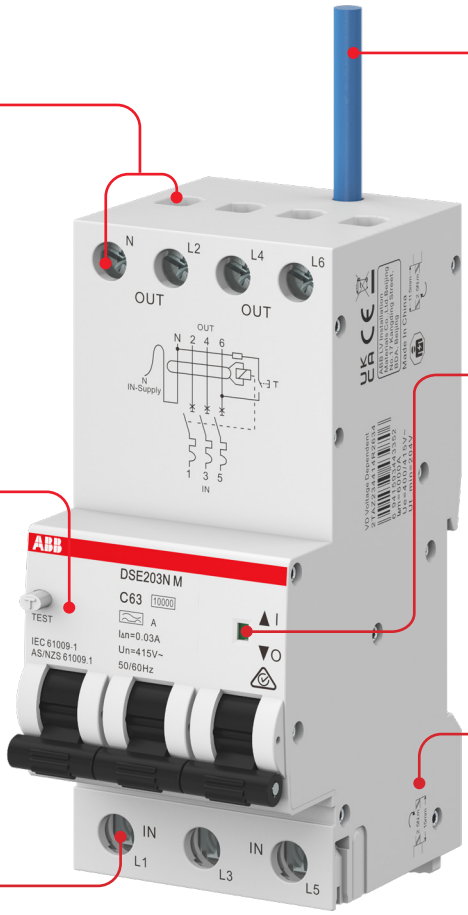

Neutral Flying lead
The neutral is supplied from the top via solid cable. Black or blue colour depending on the different country installation habits.

Guaranteed security
Contact position indicator (CPI) to show the contact status independently from the toggle position. Green: open / Red: closed.

Stable fixing
Two clips on bottom side ensure a good stability on chassis and DIN-Rail.

ABB Limited
Electrification Business Area
Tower Court
Foleshill Enterprise Park
Courtaulds Way
Coventry, CV6 5NX
Tel: +44 (0) 333 999 9900
E-Mail: LV.Enquiries@gb.abb.com
Twitter: @ABBUKEP

go.abb/electrification

Additional information
We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilisation of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.

© Copyright 2023 ABB. All rights reserved. Specifications subject to change without notice.

9AKK108468A3331 07 2023